


SPACER TYPE A HEAVY DUTY A.HD.DBV

Height (mm)	Length (m)	Width (mm)	Sub-packaging (pieces)	Commercial packaging (pieces)
50	2	75	25	250
60	2	75	25	250
70	2	75	25	250
75	2	75	25	250
80	2	75	25	250
90	2	75	25	250
100	2	75	25	250
105	2	75	25	250
110	2	75	25	250
120	2	75	25	250
130	2	75	25	250
135	2	75	25	250
140	2	75	25	250
150	2	75	25	250
160	2	75	25	250
165	2	75	25	250
170	2	75	25	250
180	2	75	25	250
190	2	75	25	250
200	2	75	25	250
210	2	85	10	100
220	2	85	10	100
230	2	85	10	100
240	2	85	10	100
250	2	85	10	100
260	2	85	10	100
270	2	85	10	100
280	2	85	10	100
290	2	85	10	100
300	2	85	10	100
310	2	upon request		
320	2	90	50	50
330	2	upon request		
340	2	90	50	50
350	2	upon request		
360	2	90	50	50
370	2	upon request		
380	2	90	50	50
390	2	upon request		
400	2	90	50	50



Certificates Intersig NV

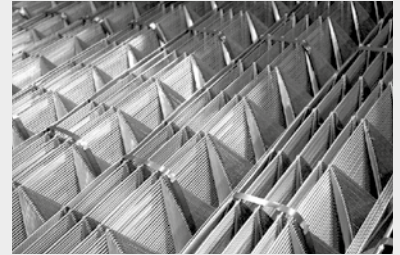


For the up to date scope on our certificates, we would like to refer you to our website.

INTERSIG

SPACER TYPE A HEAVY DUTY A.HD.DBV

DIMENSIONS

H	50-400	Calculated height	mm
B	75-90	Total width	
Ps	200	Step of the diagonals	
R	10	Bend diameter	

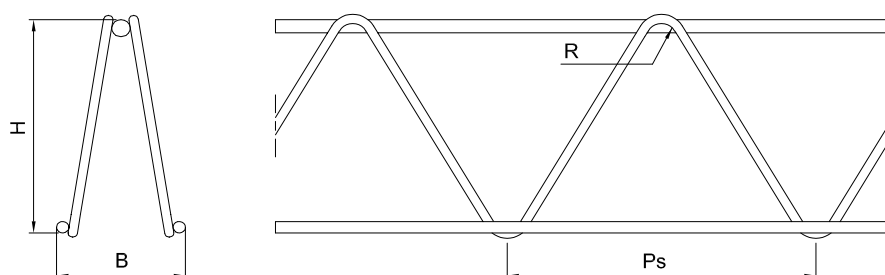

REBAR TYPE

- Upper wire B500 smooth
- Diagonal wires B500 smooth
- Lower wires B500 smooth, B500A smooth

RECOMMENDED DISTANCE BETWEEN THE SPACERS

Reinforcement diameter	Distance between the spacers	Required length / m ²
< 6,5mm	500mm	2,00lm/m ²
6,5mm to 12mm	700mm	1,50lm/m ²
> 12mm	700mm	1,50lm/m ²

MAXIMUM DEFLECTION

Load	Height
4 kN	50 < h < 400mm
6 kN	6mm

Note: calculated according to equally divided maximum weight on a 1,35m² bearing surface (cfr. DBV-test)



Certificates Intersig NV



For the up to date scope on our certificates, we would like to refer you to our website.

INTERSIG