


## TEKNISK DATABLAD - HYDRA SAM TAPE 1,5



### Beskrivelse og funksjon

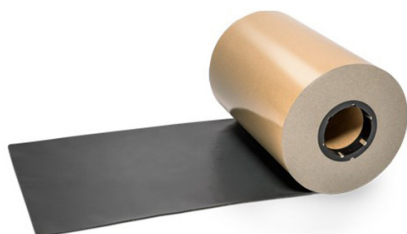

Hydra SAM Tape 1.5 er en selvklebende, ettermontert menmembran som hovedsakelig blir brukt til å vanntette og gasstette strukturer i kombinasjon med HyDra SAM Wall 1.5 eller som en ekstra tetning over skjøter i konstruksjonen.



Hydra SAM Tape 1.5 er en kaldpåført membran som kan monteres ned til -5 ° C. Den vann- og gasstette membranen består av en bitumenblanding og en tverrlaminert HDPE-film med tydelig markert overlapping, noe som letter monteringen.

Hydra SAM Tape 1.5 er CE-merket i samsvar med EN 13969 og EN 14967. Hydra SAM Tape 1.5 kan brukes på vertikale og horisontale flater, som kjellervegger, fundamenter m.m. Membranen er spesielt egnet for montasje på betong. Ved annet underlag skal HauCon forespørres.

### Fordeler

- Kan brukes ved lav temperatur
- Selvklebende, fleksibel

 0761 13	 Utkällevägen 20, SE-694 35 Hallsberg www.hydra-tec.se
<b>HyDra SAM Tape 1,5</b> <b>DS/EN 13969:2004+A1:2006</b> Cold self-adhesive polymer bitumen membrane for waterproofing	
Reaction to fire Water tightness Resistance to impact-proof Shear resistance of joints Flexibility at low temperatures Tensile strength: Max. tensile force (MD/CD) Elongation:    Along Across Resistance to static loading Resistance to tearing Durability of water tightness after artificial aging Durability of water tightness against chemicals Dangerous substances	Class E Passed Proof, Method A ≤ 200 mm 230 ±80 N/50 mm ≤ -30°C 240 ±40 N/50 mm 370 ±100 % 320 ±80 % Proof, Method B ≤ 5 kg 140 ±40 N Passed Passed None

 0761 13	 Utkällevägen 20, SE-694 35 Hallsberg www.hydra-tec.se
<b>HyDra SAM 1,5 Wall</b> <b>DS/EN 14967:2006</b> Cold self-adhesive polymer bitumen membrane for waterproofing	
Reaction to fire Water tightness Resistance to impact-proof Durability of water tightness after artificial aging/ decomposition Durability of water tightness against chemicals Flexibility at low temperature Dangerous substances	Class E Passed Proof, Method A ≤ 200 mm Passed Passed ≤ -30°C None



driftstemperatur  
 mellom -5 ° C  
 + 30 ° C



Fri for  
 løsemiddel.  
 miljøvennlig



Dampsperre



Gasstett



Vulket stripe  
 til overlapping



HDPE folie til  
 beskyttelse



DS/EN 13969  
 DS/EN 14967



Umiddelvar  
 vanntett