



## Translation of "Certificate of Quality"

No. 79-520

Oct. 20<sup>th</sup>, 2009

Max Co., Ltd.

Production Division

Product: TW897A WIRE

1. Material SAE 1016L


Mateiral	C	Mn	P	S
Percentage (%)	0.13% ~ 0.18%	0.60% ~ 0.90%	Less than 0.030%	Less than 0.035%

2. Wire Tensile Strength  
385 ~ 560 N/mm<sup>2</sup>

3. Surface treatment

—

4. Dimension (in mm scale)

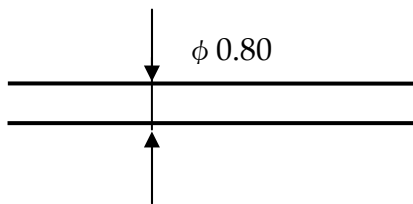

5. Resistance against rust

It should be no rust by 4cycles times under instructed test conditions.